

Introduction:

GPW100 Proximity Tag Encoder interfaces to any PC with an RS-232 serial port, high performance and high reliability. The Encoder comes with an utility software that enables you to encode the ID code into the proximity tag easily at your side. Due to **GPW100**, it becomes possible for you to program the proximity tag with the ID code you want.


Features:

- Encoded tags by GPW100 can be read by all GP Series readers or any other GP compatible readers
- RS-232 interface, 9600, N, 8, 1
- Utility software features:
 - Read a Card
 - Write a Card
 - Write cards from a file
 - Edit / Write a Card
 - Write Cards with progressive numbers
 - Duplicate a Card

Specifications:

Frequency	125KHZ, ASK
Format	64 bits, Manchester coding
Interface	RS-232 9600, no parity, 8 data bits, 1 stop bit
Tag	GITAG1 (the only suitable tag for GPW100) <ul style="list-style-type: none"> ➢ Chip type: GI 8693 Read/Write ➢ ID Code: 10 digits in Hex ➢ 125KHZ, ASK, 64 bits, Manchester coding ➢ Rate timing: MOD 64 (64 clocks per bit) ➢ Compatibility: EM H4002 (after programmed) ➢ Passive, no battery required
ID number	10 digits in Hex or 13 digits in Decimal Wiegand number format: option
Operating temperature	0 ~ 50°C
Storage temperature	-10 ~ 55°C
Humidity	10 ~ 90% relative
Dimensions	86 (W) x 120 (L) x 80 (H) mm
Power requirement	DC 9V, 500mA

※ Specification is subject to change without notice.

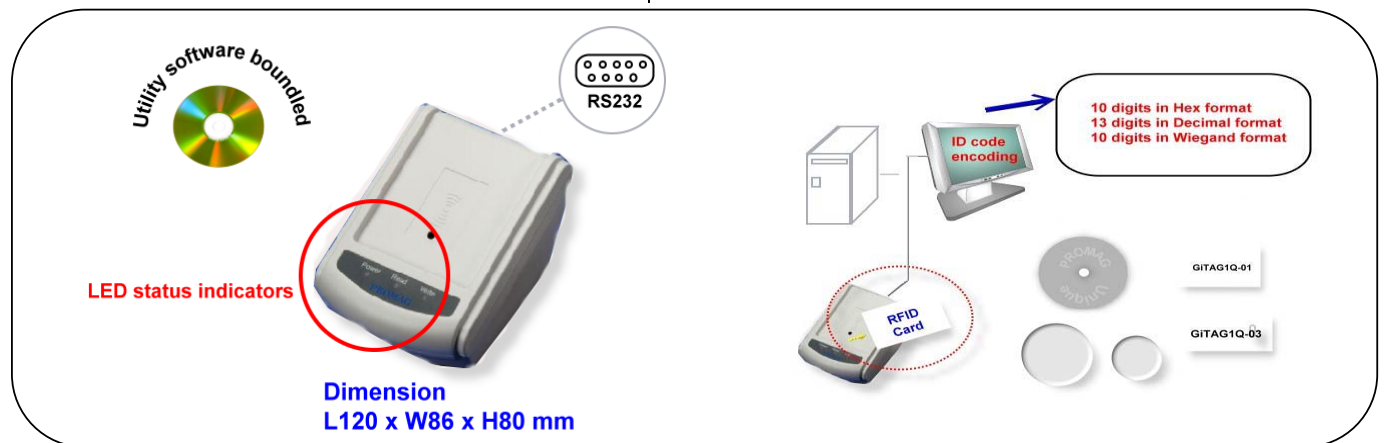

We welcome OEM inquiries

- ◆ Custom design manufacturing is available
- ◆ Custom device programming is available
- ◆ Call factory for other configuration



8F.,NO.31, LANE 169, KANG-NING
STREET,HSI-CHIH,TAIPEI,TAIWAN

TEL: 886-2-26954214

FAX: 886-2-26954213

e-mail: promag@ms24.hinet.net

promag@gigatms.com.tw

http://www.gigatms.com.tw