

# ProxData



## NetTime TR515E Online Time Recorder with Ethernet Interface

## ProxData

## NetTime TR515E Online Time Recorder with Ethernet Interface

### INTRODUCTION :

TR515E Ethernet-interfaced Time Recorder is simple to install and operate , this Time and Attendance terminal provides all the basic Time Recorder functionality in an attractive and cost-effective package .

Extremely versatile , TR515E terminal can be used as either a wall-mount or as a desktop device . An excellent viewing angle is provided in both orientations by rotating the unit 180 degrees .

### FEATURES :

- Ethernet interface connected to Ethernet hub
- Works on a standard TCP/IP network
- Bright , high-contrast blue LED display shows time of day , last 4 digits of the ID-code and error messages
- Approximately 8200 records storage capacity
- Convenient Machine Number setup feature using IN and OUT buttons simplifies multi-terminal installation
- Built-in Ring relay for external ring ( bell ) control
- Daily bell schedule of up to 32 different entries
- Built-in Magnetic Card , RFID or Mifare reader 13.56Mhz or Barcode reader
- Two buttons for clocking IN and OUT

### SPECIFICATIONS :

- a. Display : 4 x 7-segment Blue light LED
- b. Magnetic card reader : ISO Track 2 , 75 BPI
- c. Barcode reader : Visible or IR , numerical **Code 39**
- d. RFID reader : 125 KHz , ASK , 64 bits, Manchester coding, or Mifare reader 13.56Mhz
- e. Database capacity : App. 8200 records
- f. Supported interface : Ethernet , TCP/IP protocol
- g. Bell control relay : 1A , 12 V max.
- h. Power supply : DC 9 V , 500 mA
- i. Dimensions : W185 x H110 x D51 mm
- j. Installation : Wall-mount or desktop
- k. Operating temperature : 0 ~ 55 Deg. C
- l. Operating humidity : 5 ~ 95 % relative

### AVAILABLE VERSIONS :

TR515EM – with Magnetic card reader


TR515ER – with RFID card reader

TR515ER-MF - with Mifare RFID card reader, 13.56Mhz

TR515EB – with LED Barcode card reader

TR515EF – with IR Barcode card reader

- **Wireless interface model is available on request .**
- **RS-232/485 interface model is also available .**

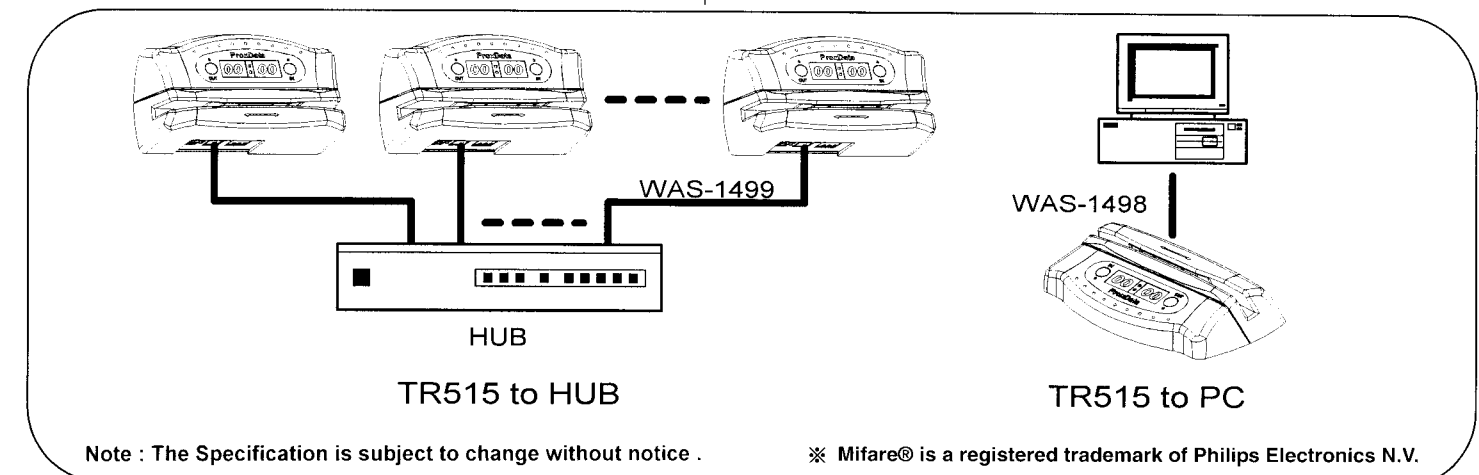

We welcome OEM inquiries

- Custom design manufacturing is available
- Custom device programming is available
- Call factory for other configuration

集佳股份有限公司  
GIGA-TMS INC.

8F.,NO.31, LANE 169, KANG-NING  
STREET,HSI-CHIH,TAIPEI,TAIWAN

TEL: 886-2-26954214

FAX: 886-2-26954213

e-mail: gigatms@ms3.hinet.net

http://www.gigatms.com.tw